


Features

- **Flame Retardant***
- **High Shrink Ratio**
- **Continuous Operating Temperature: -55°C to +110°C**
- **Shrink Temperature 95°C**
- **Inner adhesive bonds to a wide range of materials.**

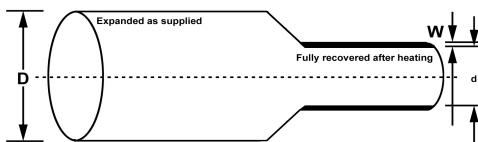

*Only jacket is flame retardant.
*Clear not flame retardant

ORDER REF. NO. IAT 300	EXPANDED	RECOVERED		STANDARD LENGTHS
	INTERNAL DIAMETER	INTERNAL DIAMETER	WALL THICKNESS	
	D (MIN)	d (MAX)	W (NOM)	
	mm	mm	mm	m
3/1	3.0	1.0	1.0	1.22
4.5/1.5	4.5	1.5	1.1	1.22
6/2	6.0	2.0	1.2	1.22
9/3	9.0	3.0	1.4	1.22
12/4	12.0	4.0	1.7	1.22
19/6	19.0	6.0	2.1	1.22
24/8	24.0	8.0	2.4	1.22
40/13	40.0	13.0	2.4	1.22

Also available on reels - MOQs' may apply.

Property	Test Method	Performance (Typical)
Tensile Strength	IEC 60684-2	15.0 Mpa
Elongation	IEC 60684-2	400%
Longitudinal Change	ASTM D-2671	-15% max
2% Secant Modulus	ASTM D-2671	16000psi (110Mpa)
Specific Gravity	ASTM D-792, ISO R1183	1.25 g/cm ³
Heat Resistant Properties (16hrs @ 175°C)	MIL-DTL-23053/4	No cracking or flowing of outer wall
Heat Shock	ASTM D-2671	No cracking or flowing of outer wall
Low Temperature Flexibility (4hrs @ -55°C)	ASTM D-2671	No cracking
Flammability	ASTM D- 876	Flame retardant jacket

Electrical Properties		
Dielectric Strength	VDE 0303 Part 2	22kV/mm
Volume Resistivity	VDE 0303 Part 3	10 ¹⁴ Ohm-cm
Chemical Properties		
Corrosive Action	ASTM-D 2671	Non-corrosive
Copper Compatibility	ASTM D-2671	No Corrosion
Water Absorption	VDE 0472	0.15%
Fungus Resistance	ASTM G-21	No Growth

STANDARD COLOURS	
black ●	clear ○
Special colours available subject to MOQs'	

All information contained in this leaflet is believed to be reliable. We advise however that customers should separately evaluate the suitability of the products for their particular application. Heatshrink Solutions Limited give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. In no instance will we be liable for any eventual, indirect, or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.