

**Railed Wrap Around Sleeve (non reinforced)**

Railed Wrap Around Sleeve with stainless steel flexible locking channel.

Coated internally with a hotmelt adhesive liner.

Mainly used in jointing, repairing & sealing of cables.

The outer surface of the sleeves have thermocromic paint splatter providing a clear visual indication of sufficient shrink temperature


**Features**

- High shrink ratio.
- Provides a water tight seal upon recovery.
- Application is quick, simple, clean & easy to install in situ over live cable.
- Available with standard (*RSWP*) or high melt point adhesive (*RSWA*)
- Also available as a rail-less sleeve variant or reinforced for pressurised applications. (see *RLSW* & *RSXA*)



ORDER REF. NO.	EXPANDED		RECOVERED		STANDARD LENGTH
	INTERNAL DIAMETER D (MIN)	WALL THICKNESS W (NOM)	INTERNAL DIAMETER d (MAX)	WALL THICKNESS (NOM)	
<b>RSW</b>	mm	mm	mm	mm	mm
<b>36/10</b>	36	1.1	10	3	1000
<b>55/13</b>	55	1.1	13	3	1000
<b>80/20</b>	80	1.1	20	3	1000
<b>110/30</b>	110	1.1	30	3	1000
<b>145/36</b>	145	1.1	36	3	1000
<b>198/55</b>	198	1.1	55	3	1500
<b>250/98</b>	250	1.1	98	3	1500

A wide range of other sizes & lengths available to order

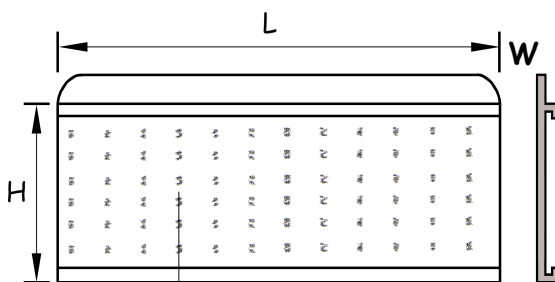

T.I.PAINT

L- Length as per requirement ~ maximum 1500mm

Property	Performance (Typical)
Tensile Strength	2100psi (15Mpa max)
Dielectric Strength	12MV/m
Longitudinal Change	±10% max
Thermal Ageing (168hrs @ 150°C)	100,000psi (300Mpa)
Environmental Stress (visual)	No Cracking
Cracking Strength	100N/25mm
Cutting Strength	200N (min)
Softening Point for Adhesive	90°C

STANDARD COLOURS
black ●
Special colours available on request

All information contained in this leaflet is believed to be reliable. We advise however that customers should separately evaluate the suitability of the products for their particular application. Heatshrink Solutions Limited give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. In no instance will we be liable for any eventual, indirect, or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.